


Type code:

- ...G...: Sheet-steel enclosure / Degree of protection IP20

- suitable for the stationary mounting in dry room.
- Degree of protection IP20
- Protection against the ingress of solid foreign matters, which are not larger than 12,5 mm.
- No protection against the ingress of water.
- Powder coating as corrosion protection
- State at delivery: enclosure with installed transformer or reactor and each with an entry for the lead wire and the end lead (self-sealing grommet or threaded joint).

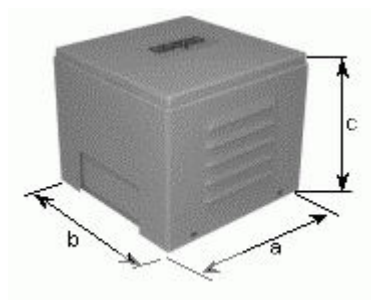

Remark:

The type designation of products in enclosures consists of the designation of the product + the designation of the enclosure.

Example:

The transformer DTSN0,1 is going to be installed in an enclosure
=> DTSNG0,1

Maximum to be installed transformer power, weights and dimensions for the enclosure types ...G...

Type designation	Size in kVA	a in mm	b in mm	c in mm	weight in kg *
G2	0,1 - 0,3	180	180	150	1,5
G13	0,5 - 0,75	225	305	165	4,0
G14	1,0 - 2,5	310	385	225	5,1
G15	3,0 - 4,0	360	500	275	7,8
G19/1	5,0 - 7,5	400	400	350	12,0
G19/2	8,8 - 10,0	450	460	365	14,0

* The given weight has to be added to the weight of the installed transformer or reactor.